Digital Wireless Series Product User's Guide

Wireless Tissue Box

Version: 1.0
131218

Thank you for purchasing our Wireless Tissue Box. Please read this manual before installation.

For customer support, please contact your dealer, and keep your Invoice for further support.

Do not open/modify the device, as it may cause damage to the unit and void the Warranty. For internal repairs, consult your dealer or an Authorized Service Center.

Do not use any accessories other than what comes with the unit otherwise, it would void the warranty.

Protect from humidity. Do not put it in water and be careful to protect it from rain, sea water, or high humidity environment etc.

Protect from high temperatures

To avoid damage or mis-operation of the device, only use it in the temperature between 0 ~ +40°C.

Do not bring the device suddenly from a hot to a cold place, or vice versa. This may cause damaged to the inside of the unit by creating condensation.

EU Environmental Protection

The symbol of crossed-out garbage shows that this product should not be treated as household waste, and it falls into the category of ***electric /electronic*** equipment for recycling. This electronic device should not be disposed in a regular trash. We strongly advice you to contact related authorization before you dispose this product.

Table of contents

Package contains 4
User's Interfaces 5
Get unit work quickly 6
Software & Hardware Specifications on Mobile Devices 8
How to Charge The Battery 8
ASP4 (PC Player) User's Interface 9
Remote Viewing Steps for PC 10
Remote Viewing Steps for Mobile 13
Technical Specification 16

Package contains

Main Unit x1

Power Adapter x 1

3.7V 4800mA Li-polymer
battery x 1

User’s Interfaces

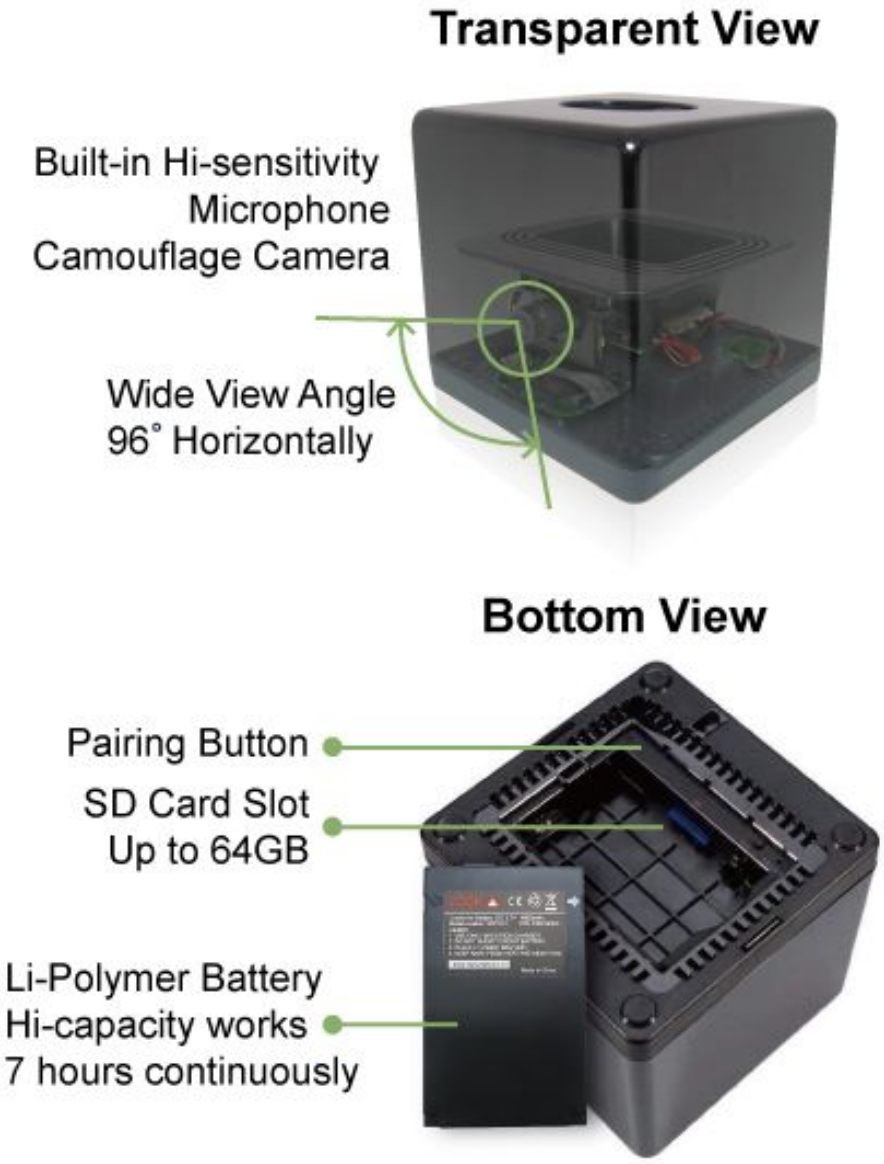

Get unit work quickly

1. The Power LED (red) will be on when the Transmitter/Receiver is turned on.
2. Below transmitters and receivers are fully inter-operable.

Receiver

Transmitter

3. How to Pair Up:

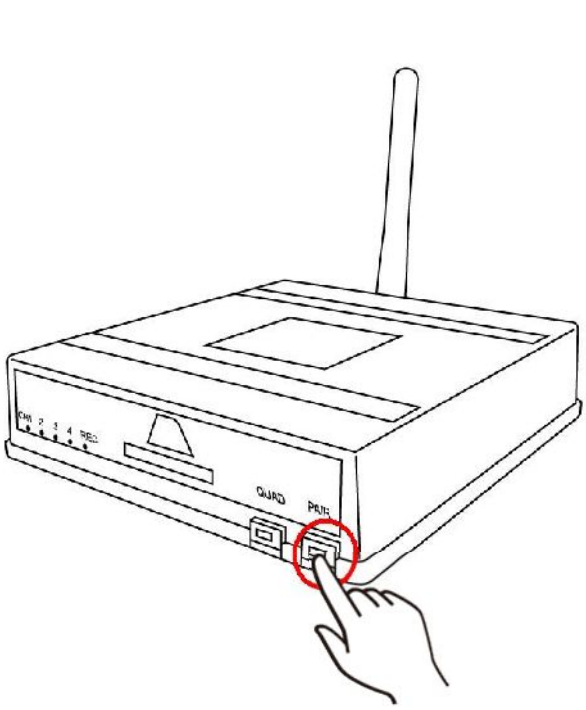

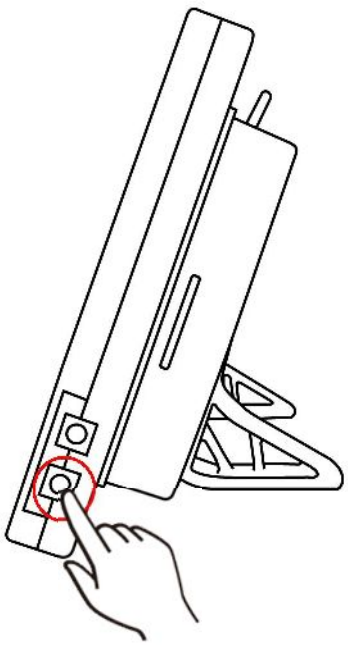

3.1 Select a channel on the Receiver (use remoter controller), long press the pairing button till the channel LED (blue) is flashing.

3.2 Press the pairing button on the transmitter.

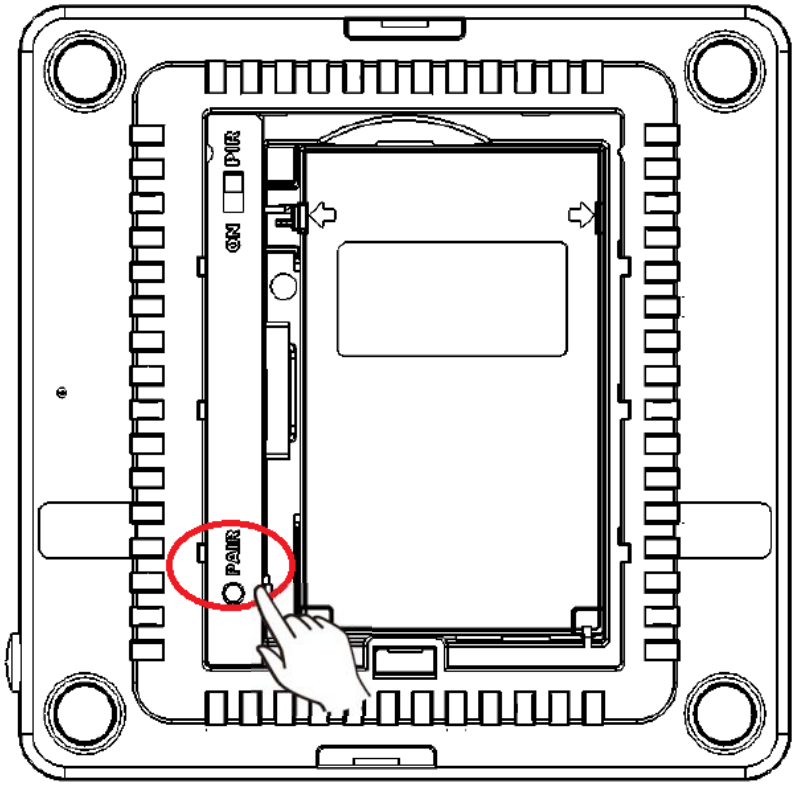

3.3 After pairing is completed and successful, the Channel LED (blue) on Receiver will be flashing rapidly, and the image will show on the Monitor.

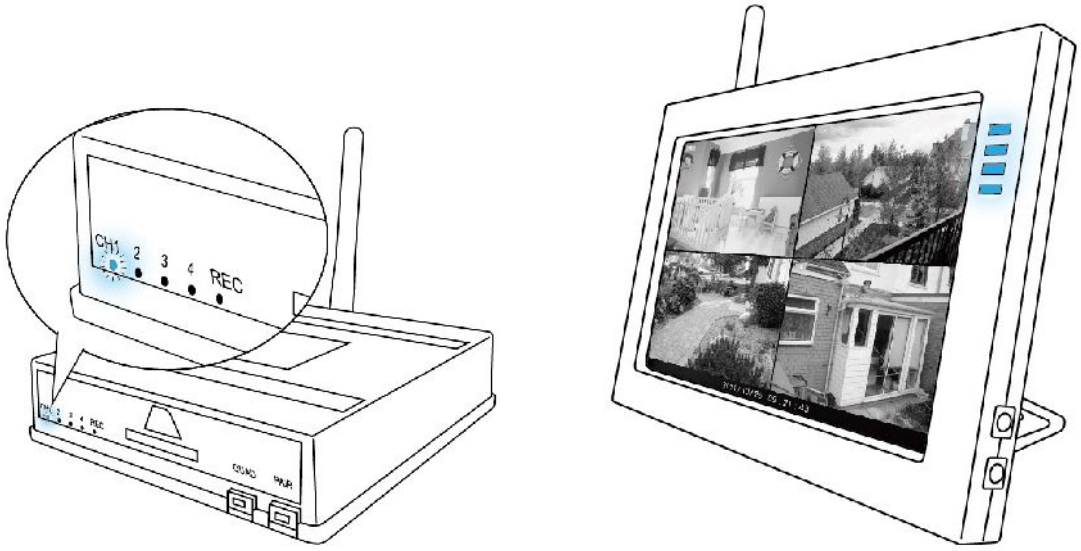

- **A Receiver is able to be paired up to 4 different Transmitters, and to receive image from 4 Transmitters simultaneously.**

Software & Hardware Specifications on Mobile Devices

To use the remote viewing on PC, we highly recommend you to have following software and hardware specifications on your PC,

- Microsoft® Windows XP, or Windows 7 (.NET Framework 3.5 higher)
- Internet Explorer® 8 or higher.
- CPU: 2.0GHz or higher (only support x86 and x64)
- Memory: 1GB or above
- Display card: Independent display card and support DirectX 9.0 or higher.

To use the remote viewing on iPhone / iPad, we highly recommend you to have following software and hardware with your iPhone / iPad,

- iPhone 3 or higher
- iPad
- iOS 4.3 or higher

Other remote devices,

- Android 4.0 or above
- IE / Chrome are supported

How to Charge The Battery

Connect the provided power adapter with the cradle, the charging time is around **3 hours** and the green LED will be on *(Please charge for **10 hours** when you charge the battery for the first time)*. The battery, after fully charged, can last for **6.5 hours** at least under continuous recording. However, the battery power will be dramatically reduced when recording with IR LED. Under motion activation or power saving mode, Tissue Box can last for longer.

* NOTE: Under low temperature conditions, the battery will have a shorter life than normal.
* NOTE: Please use the bundled power adapter only. Damage which is caused by other power adapter will be beyond warranty.
* NOTE: For better performance it is recommended to charge the battery once every 3 weeks.
* NOTE: please re-charge the battery to full when receiving the wireless Tissue Box**.**

ASP4 (PC Player) User's Interface

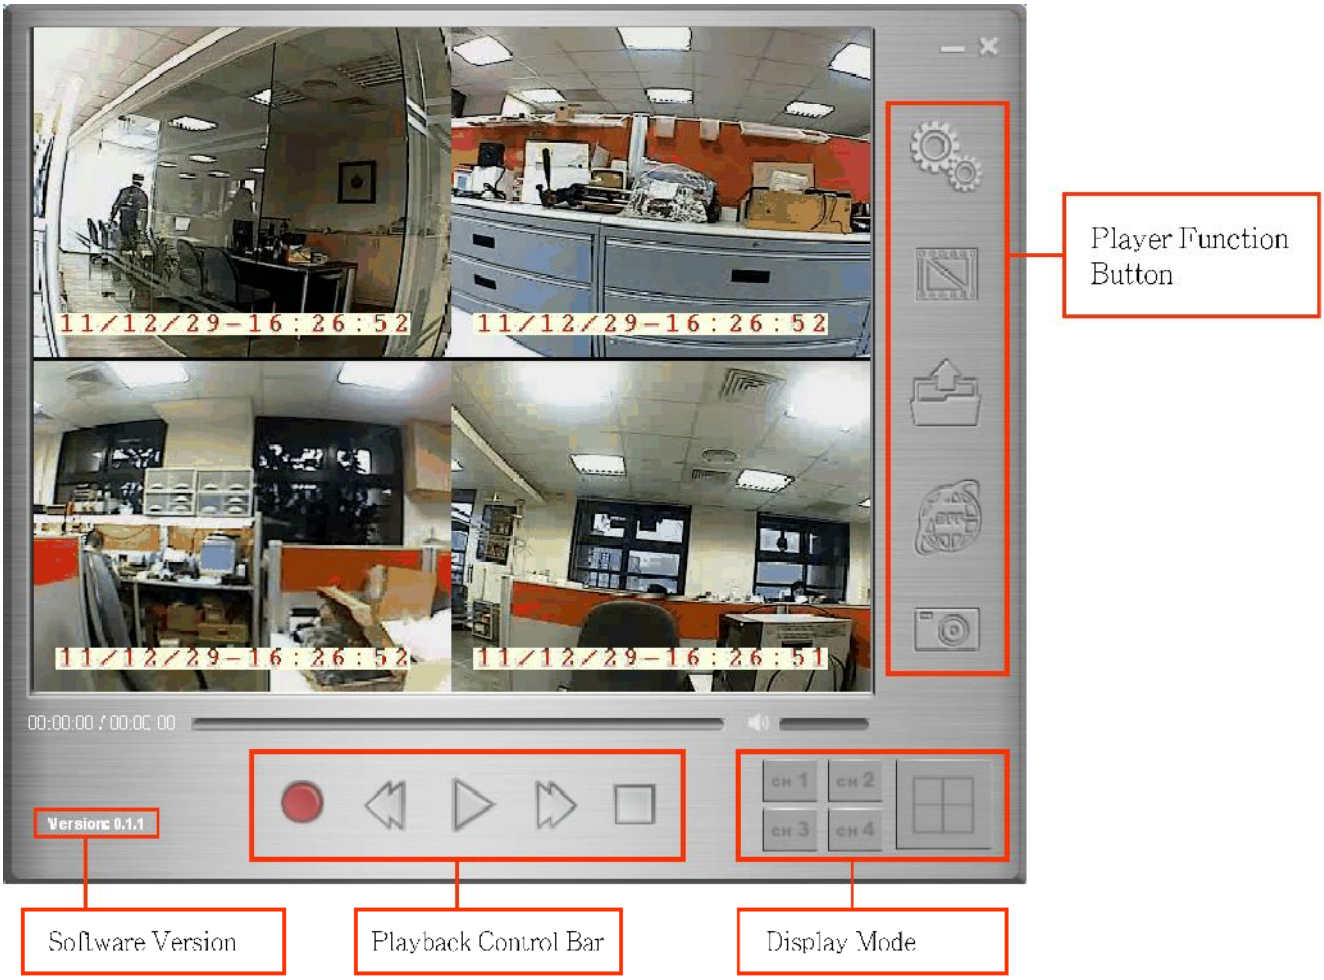

	System Setting		Recording Mode
	Open file, to search the recording files		Network ON / OFF (for remote view)
	Snapshot, to save JPG picture		CH1 Full screen display
	CH2 Full screen display		CH3 Full screen display
	CH4 Full screen display		Quad-View display
	Manual recording during live view & backup files during playback		Backwards
	Pause		Forwards
	Stop		Play

Remote Viewing Steps for PC

Easy 3 steps to see the Live View remotely:

Step 1. Install the bundled software ASP4 on PC, and highly recommend to change the log-in User Name / Password (**default User Name & Password: admin / admin**) in “Network Setting”. The “**ID**” means receiver ID number, it would automatically show on the network setting when you plug-in your USB cable.

** Click **OK** to complete the setting and protect the data security.

Step 2. Finished the network setting, the Remote viewing web link and the surrounding view will display on the PC ASP4 software.

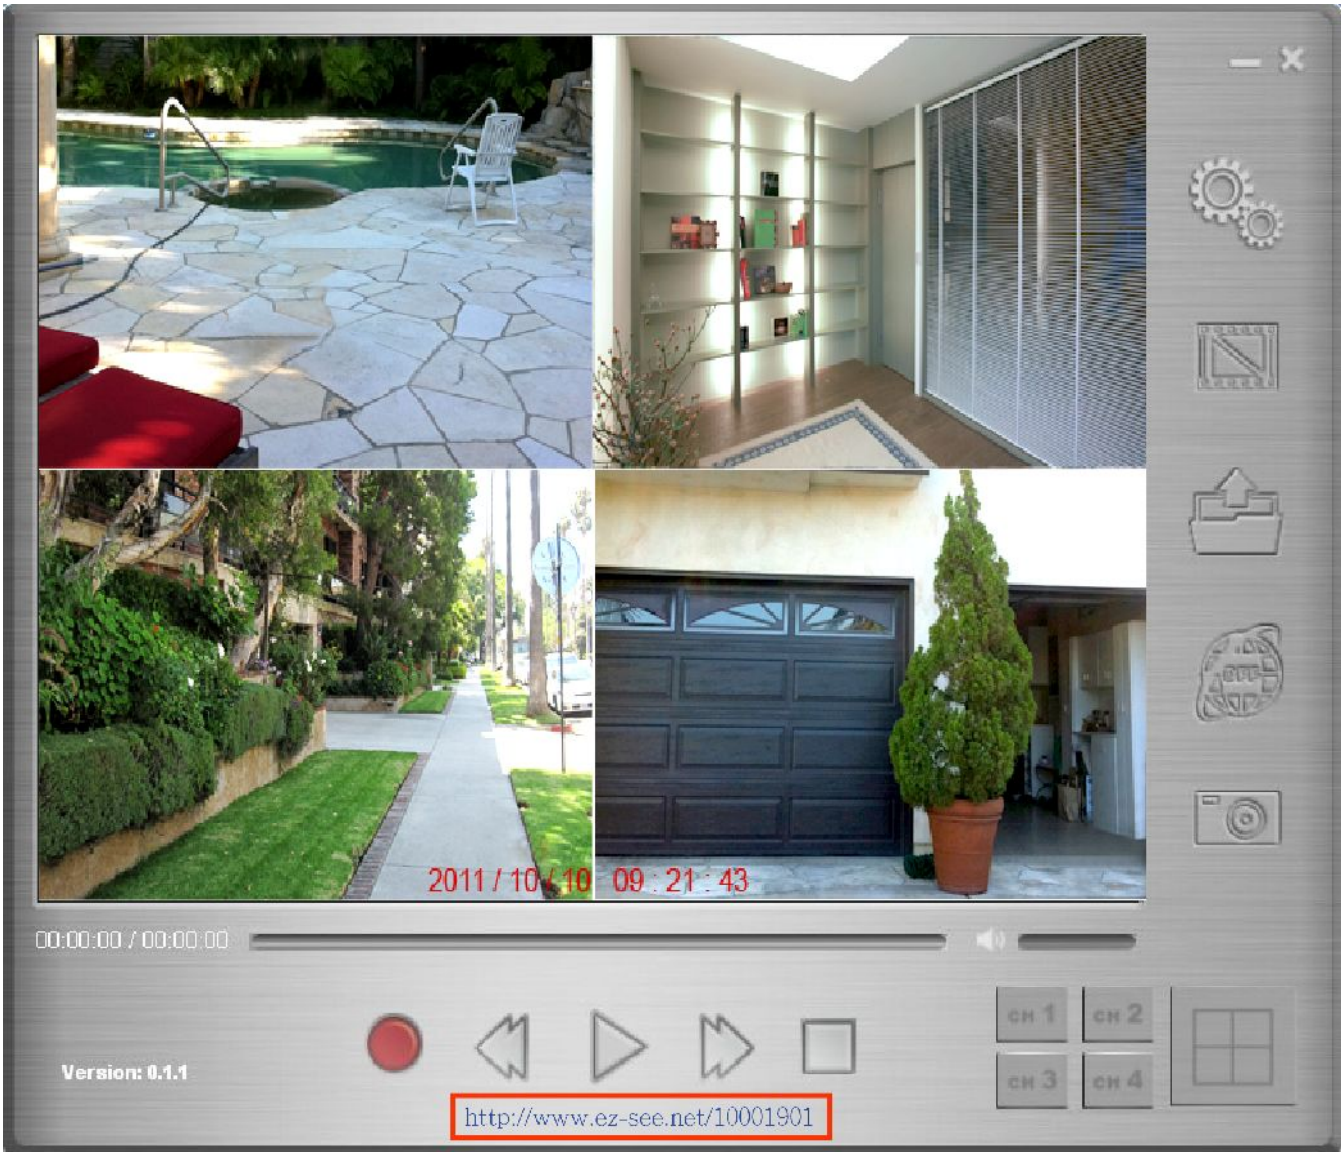

** http://www.ez-see.net/10001901

Server domain name

Receiver ID number (8 digit), each Receiver device has its own ID number. User have to key in www.ez-see.net/xxxxxxxx (Receiver ID number) on IE browser and to enter the remote viewing page.

Step 3. You could key in the **remote viewing web link** on PC IE browser (e.g., http://www.ez-see.net/10001901), log-in your account on remote PC IE browser, see the Live View!
(*Remark: currently IE is the only PC web browser supported for remote viewing.)
PC log-in page:

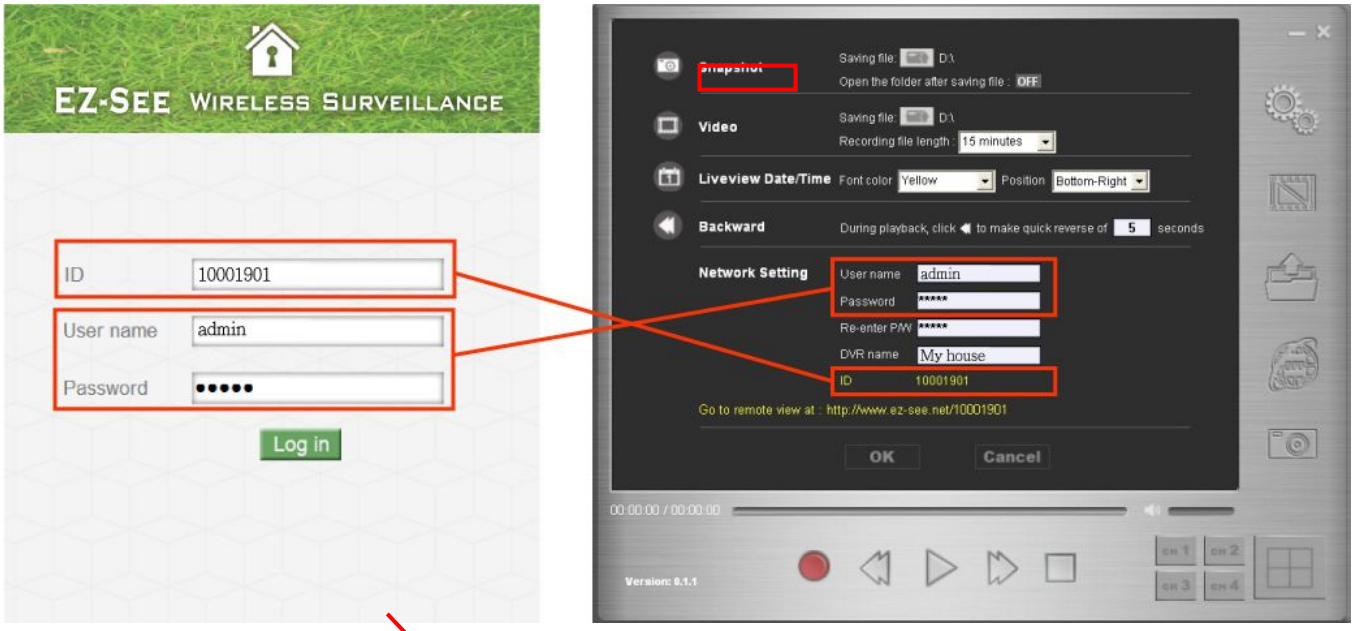

(Remote viewing page)

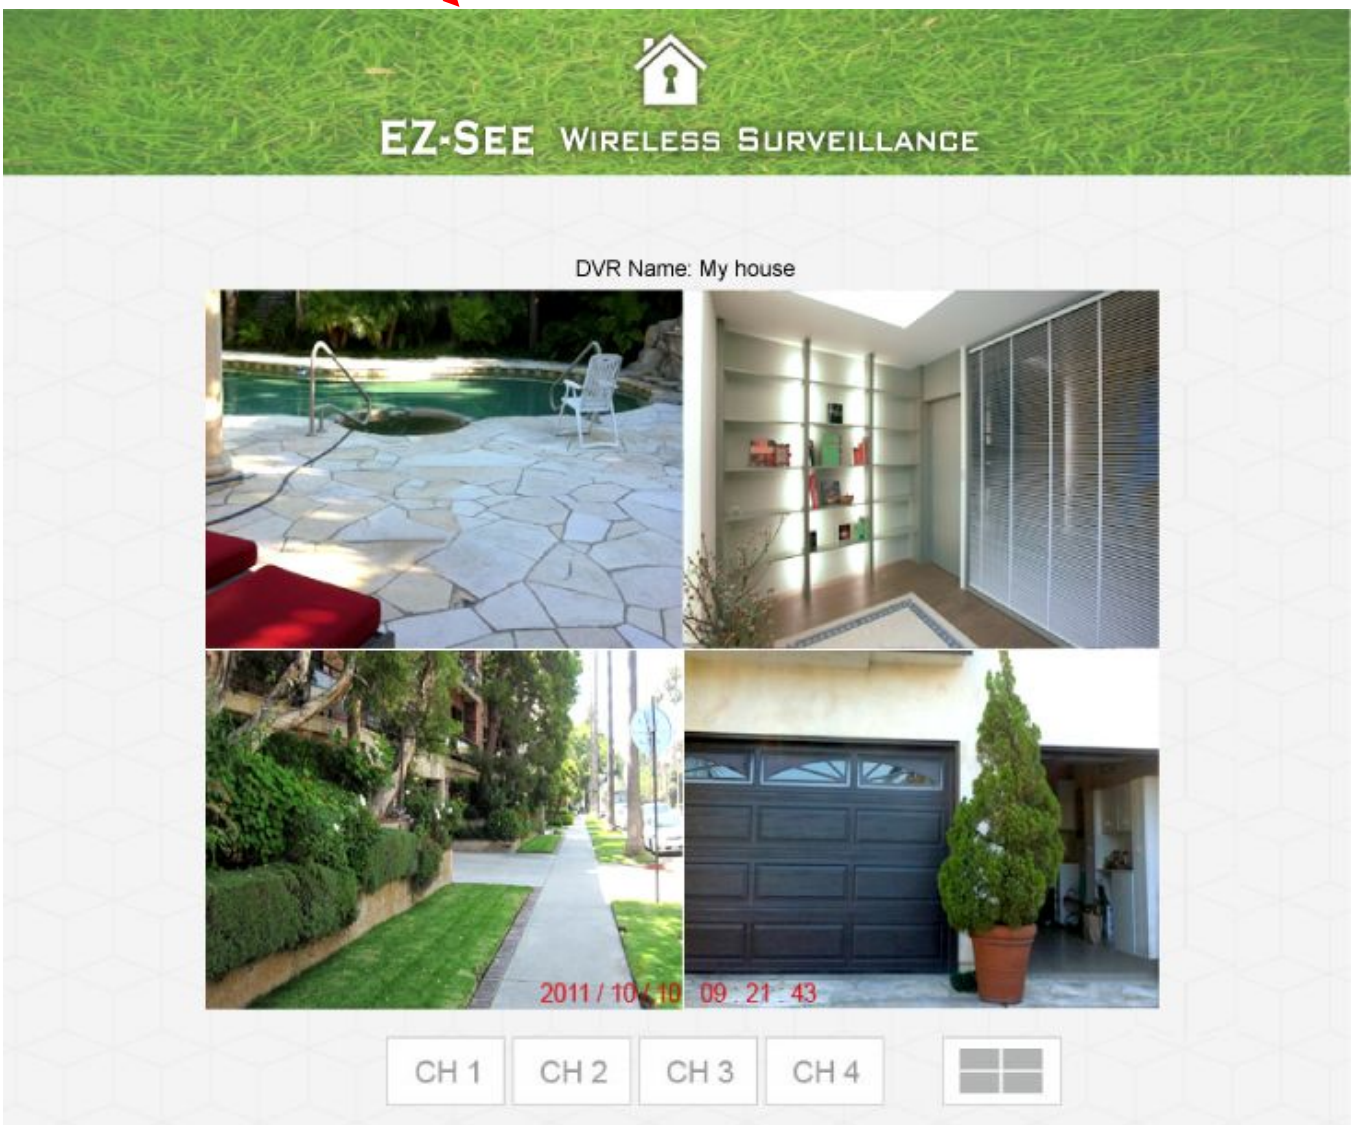

Remote Viewing Steps for Mobile

Step1. Search “**EZ-SEE**” app on APP Store.

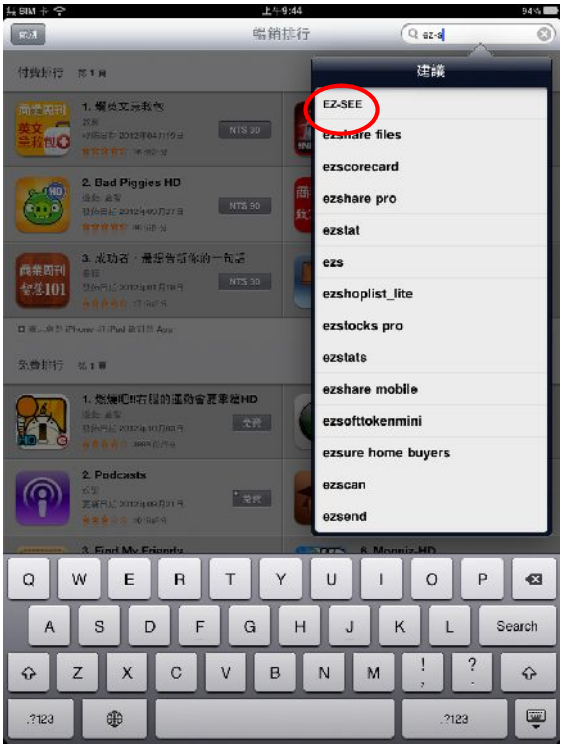

Step2. Press "add" to create an account as your EZ-SEE ID,

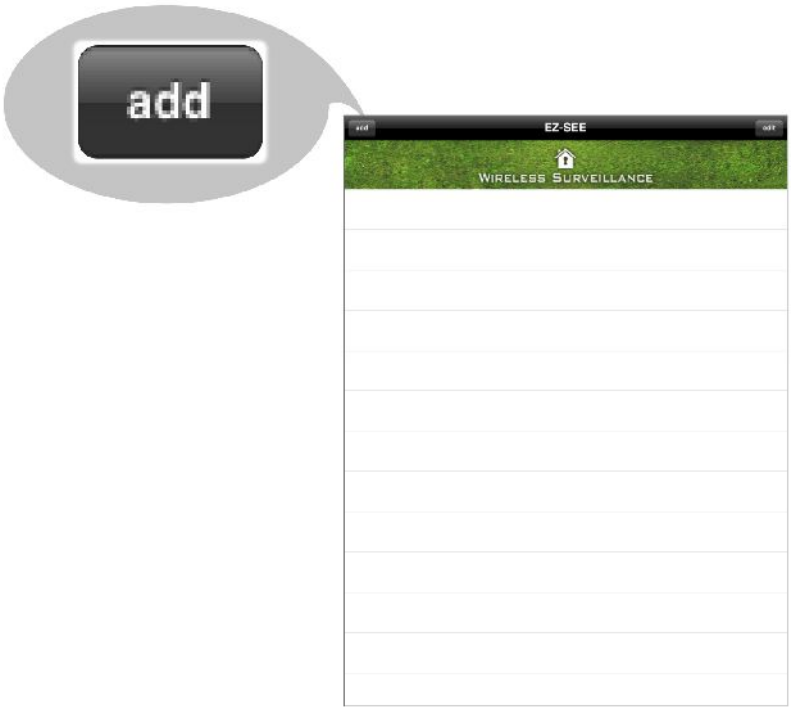

Step3. Fill in the ID, User Name and Password (same as the ASP4 network setting) and press "Save" button which on the upper right corner.

Step4. You will see your ID number on your mobile (e.g., 10001901).

Step5. Enjoy your live viewing!! In this page, you could check the Quad-viewing or one channel viewing mode by your desire. On the top of the page, you would see your defined DVR name (same as your DVR name on ASP4 software network setting).

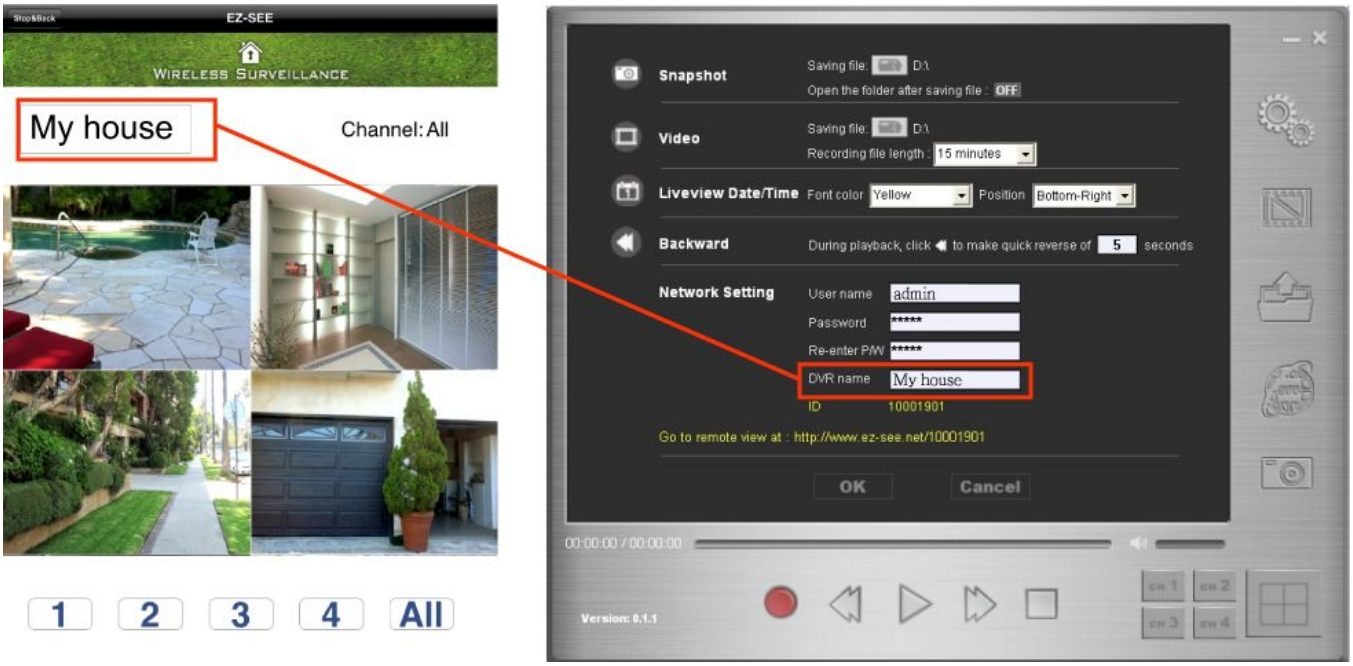

(Quad-viewing)

Technical Specification

Channel Pairing	4 Tx to 1 Rx
Operation Frequency Range	2408.625 ~ 2470.5 MHz
Channels hopping	24 channels
Modulation	GFSK, FHSS (digital)
Transmission Range	150M (or longer with high gain antenna)
Transmitter RF output power	15.5 ~ 18.5 dBm
Resolution / Frame Rate	640x480 @ 30fps
Reserved PIR motion sensor input (Alarm input)	1 set (Reserved)
Antenna connection	Fixed Type
Antenna gain	1.5 dBi
RF Data Rate	3Mbits /Second
PCB Dimensions	48 x 48 MM
Video Source Input	Analog
Alarm Input	1 set (reserved for PIR motion sensor input)
Power Consumption	12V 270mA (with camera) 12V 120mA (without camera)
Power	12V
Operating temperature	0°C ~ 40°C (32°F~ 104°F)

Thank you for purchasing our Wireless Tissue Box. Please read this manual before installation.
For customer support, please contact your dealer, and keep your Invoice for further support.

Do not open/modify the device, as it may cause damage to the unit and void the Warranty. For internal repairs, consult your dealer or an Authorized Service Center.

Do not use any accessories other than what comes with the unit otherwise, it would void the warranty.

Protect from humidity. Do not put it in water and be careful to protect it from sea water or high humidity environment etc.

Protect from high temperatures
To avoid damage or mis-operation of the device, only use it in the temperature between 0 ~ +40°C.

Do not bring the device suddenly from a hot to a cold place, or vice versa. This may cause damaged to the inside of the unit by creating condensation.

EU Environmental Protection

The symbol of crossed-out garbage shows that this product should not be treated as household waste, and it falls into the category of ***electric /electronic*** equipment for recycling. This electronic device should not be disposed in a regular trash. We strongly advice you to contact related authorization before you dispose this product.